


1	2	3	4
RevNo	Revision note	Date	Signature
00	Sketch Only	5/11/2017	

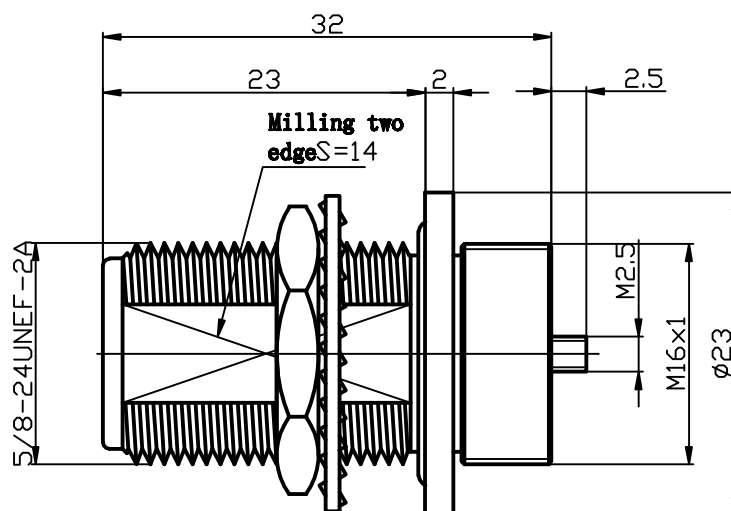

Interface Per: MIL-STD-348, IEC 60169-16

Material & Finishing:

1. Center conductor: Beryllium Copper, Silver Plating
2. Insulators: PTFE
3. Body&chter Metal: Brass, Albaloy plating
- 4.Gasket: Silicone Rubber
- 5.inner tooth washer: Phosphor Bronze, Albaloy plating

Electrical Data:

1. Impedance: 50 Ohms
2. Frequency Range: DC to 8 GHz
- 3, VSWR: 1.2 MAX

ALL DIMENSIONS ARE IN MILLIMETERS AND [INCHES]

KERUI ELECTRONIC CO;LTD

THESE DRAWING & SPEC. ARE THE PROPERTY OF KERUI ELECTRONIC CO;LTD AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.

UNLESS OTHERWISE NOTED ALL SURFACES FINISHED TO 64/MAX.  
ALL TOLERANCES ARE:  
DECIMALS FRACTIONS ANGLES  
x ± 1.0 ±1/64 x' ± 1°  
x.x ± 0.5 x'x' ± 0.5°  
x.xx ± 0.1

Title

N female thread mounting cable connector

Drawn by

Ckd by

Appd by

Date

5/11/2017

Scale

2.5:1

Sheet 1 of 2

80 1121 075 05