


RevNo	Revision note	Date	Signature	Checked
00	Release	8/21/19	Teresa	Simon
01	change Stainless Steel304 to Stainless Steel303	8/26/19	Teresa Simon	

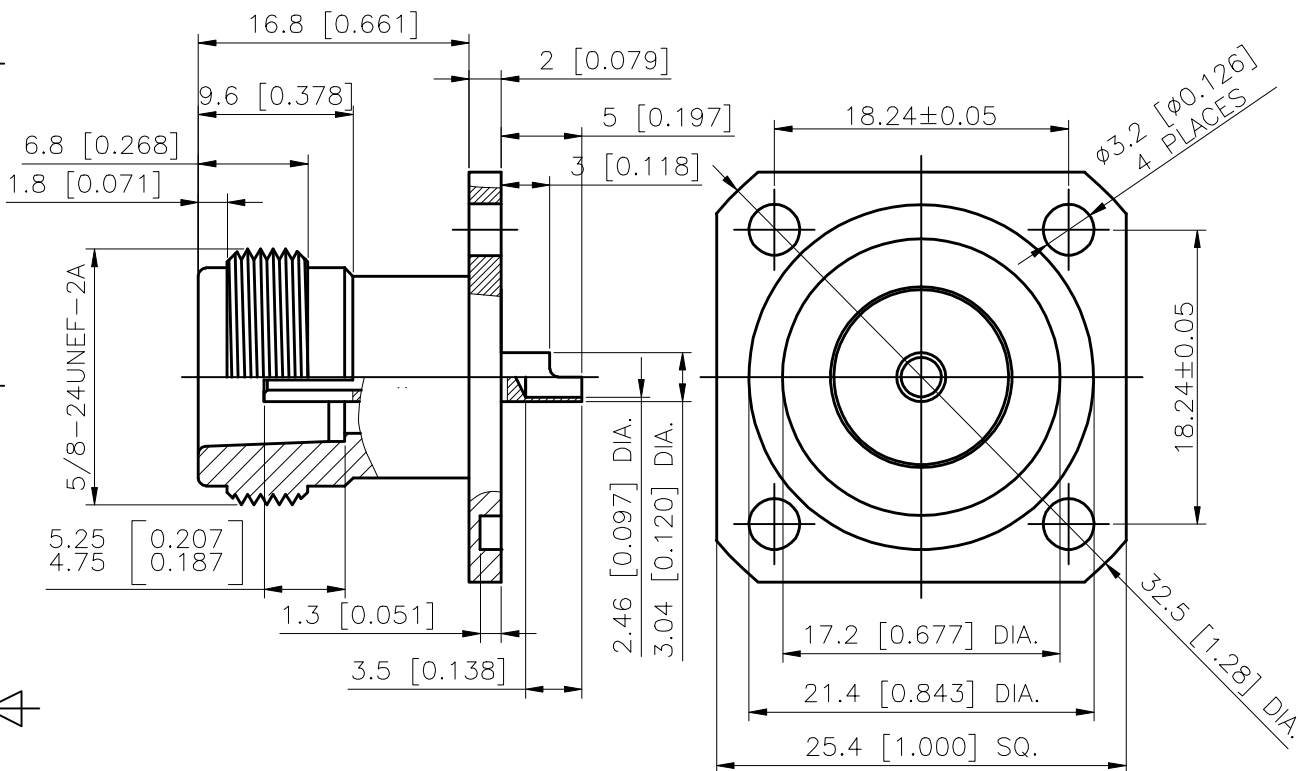

Interface Per: MIL-STD-348, IEC 60169-16

Material & Finishing:

1. Center conductor: Beryllium Copper, Gold Plating
2. Insulators: PTFE
3. Body: Stainless Steel303

ALL DIMENSIONS ARE IN MILLIMETERS AND [INCHES]

LIJEN, LLC from KERUI

Title

N female 1" flange
panel mounted receptacle
(N-KFD-30)

THESE DRAWING & SPEC. ARE THE PROPERTY OF LIJEN, LLC FROM KERUI AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.

UNLESS OTHERWISE NOTED
ALL SURFACES FINISHED TO 64 MAX.
ALL TOLERANCES ARE:
DECIMALS FRACTIONS ANGLES
x ± 1.0 ±1/64 x' ± 1°
x.x ± 0.5 x'x' ± 0.5
x.xx ± 0.1

Drawn by
Teresa

Ckd by
Simon

Appd by
Richard

Date
8/21/2019

Scale
2.3:1

Sheet 1 of 2

80 1121 046 14

Electrical Data:

1. Impedance: 50 Ohms
2. Frequency Range: DC to 11.0 GHz
3. Contact Resistance: Inner Contact: 1.0 milliohms max.
Outer Contact: 0.25 milliohms max.
4. Insulation Resistance: 5000 megaohms min.
5. Dielectric Withstanding Voltage: 2500 V
6. VSWR: N/A (Uncabled receptacles)

Mechanical Data:

1. Contact Captivation: Axial force: 28 N
2. Coupling Nut Torque:
Recommended: 0.7–1.1 N.m
Max.: 1.7 N.m
3. Durability: 500 cycles

Environmental Data:

1. Operating Temperature Range: -55°C up to 155°C
2. Test Categories: IEC 55/155/21
3. Relative Humidity: MIL-STD-202, Method 106
4. Thermal Shock: MIL-STD-202, Method 107, Cond. B
5. Shock: MIL-STD-202, Method 213, Cond. J
6. Vibration: MIL-STD-202, Method 204, Cond. B
7. Corrosion: MIL-STD-202, Method 101, Cond. B

RoHS Compliant.

ALL DIMENSIONS ARE IN MILLIMETERS AND [INCHES]

LIJEN, LLC from KERUI

THESE DRAWING & SPEC. ARE THE PROPERTY OF LIJEN, LLC FROM KERUI AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.

UNLESS OTHERWISE NOTED
ALL SURFACES FINISHED TO 64/MAX.
ALL TOLERANCES ARE:
DECIMALS FRACTIONS ANGLES
 $x \pm 1.0$ $\pm 1/64$ $x' \pm 1^{\circ}$
 $x.x \pm 0.5$ $x'x' \pm 0.5$
 $x.xx \pm 0.1$

Title

N female 1" flange
panel mounted receptacle
(N-KFD-30)

Drawn by
Teresa

Ckd by
Simon

Appd by
Richard

Date
8/21/2019

Scale

Sheet 2 of 2

80 1121 046 14