


RevNo	Revision note	Date	Signature	Checked
A	Released	1/21/15	Teresa	Simon
B	Change the Model No.	1/29/15	Teresa	Simon
C	Change the Title	8/17/15	Teresa	Simon

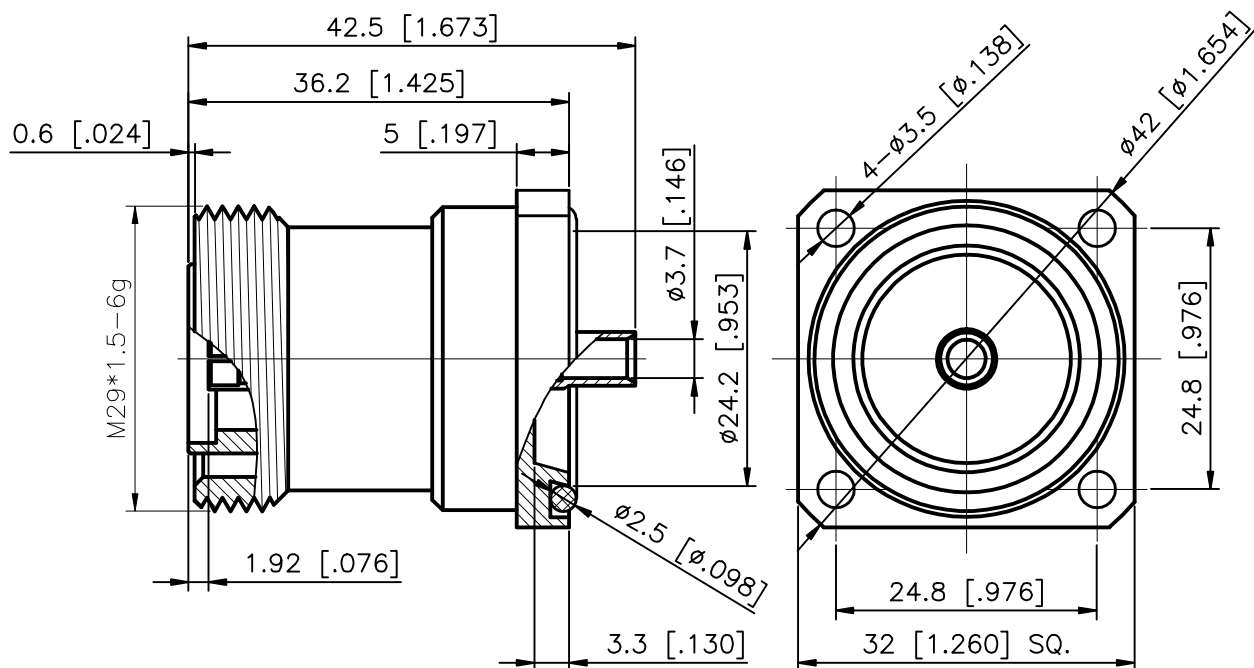

RoHS Compliant.

Interface Per: MIL-STD-348, IEC 60169-4

Material & Finishing:

1. Center condutor: Beryllium Copper, Silver Plating
2. Insulators: PTFE
3. Body: Brass, Albaloy plating

Electrical Data:

1. Impedance: 50 Ohms
2. Frequency Range: DC to 7.5 GHz
3. 3rd PIM: -160 dBc @ max. @ 2*43 dBm

Group 30 cable of KR: .141 semi-flex or semi-rigid cable

8002447

ALL DIMENSIONS ARE IN MILLIMETERS AND [INCHES]

LIJEN, LLC from KERUI

Title DIN female flange cable connector
solder for group 30 cable
(DIN-KF141)

THESE DRAWING & SPEC. ARE THE PROPERTY OF LIJEN, LLC FROM KERUI AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.

UNLESS OTHERWISE NOTED
ALL SURFACES FINISHED TO 64/MAX.
ALL TOLERANCES ARE:
DECIMALS FRACTIONS ANGLES
x ± 1.0 ±1/64 x' ± 1°
x.x ± 0.5 x'x' ± 0.5
x.xx ± 0.1

Drawn by
Teresa

Ckd by
Simon

Appd by
Richard

Date
8/17/2015

Scale
1.5:1

Sheet 1 of 2

90 1121 330 05