


RevNo	Revision note	Date	Signature	Checked
01	Change the dimensions of fastener from $\varnothing 3.8$ to $\varnothing 4.15$ and from $\varnothing 6.6$ to $\varnothing 8$	06/07/23	Teresa	Simon
02	Add a dimension of 76.2 [3] REF.	06/19/23	Teresa	Simon
A	Released	02/23/24	Teresa	Simon

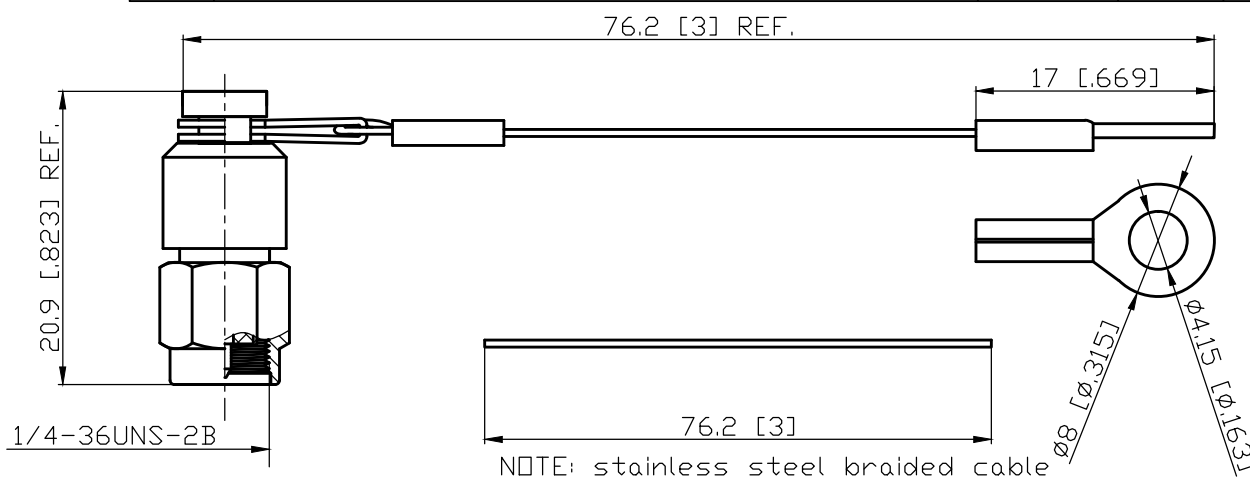

RoHS (2002/95/EC) Compliant.

Interface Per: MIL-STD-348, IEC 60169-15

Material & Finishing:

1. Center condutor: Brass, Gold Plating
2. Insulators: PTFE
3. C'ring: Beryllium Copper
4. Gasket: Silicone Rubber
5. Body : Brass, Albaloy Plating
6. Cover: Brass, Nickel Plating
7. Coupling Nut: Brass, Nickel Plating
8. Resistor: 2W
9. Braided cable: stainless steel

Electrical Data:

1. Impedance: 50 Ohms
2. Frequency Range: DC to 2 GHz
3. VSWR: 1.15 max.

ALL DIMENSIONS ARE IN MILLIMETERS

LIJEN, LLC from KERUI

Title

SMA male 2W Termination  
(SMA-J2W)

THESE DRAWING & SPEC. ARE THE PROPERTY OF KERUI ELECTRONIC CO.,LTD AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.

UNLESS OTHERWISE NOTED  
ALL SURFACES FINISHED TO 64/MAX.  
ALL TOLERANCES ARE:  
DECIMALS FRACTIONS ANGLES  
x  $\pm$  1.0 x'  $\pm$  1°  
x.x  $\pm$  0.5 x'x'  $\pm$  0.5°  
x.xx  $\pm$  0.1  $\pm$  1/64

Drawn by  
Teresa

Ckd by  
Simon

Appd by  
Richard

Date  
10/10/2019

Scale  
2:1

Sheet 1 of 1

77 10 111 020 04