


1		2		3		4	
RevNo	Revision note			Date	Signature	Checked	
00	Sketch Only			05/06/23	Teresa	Simon	

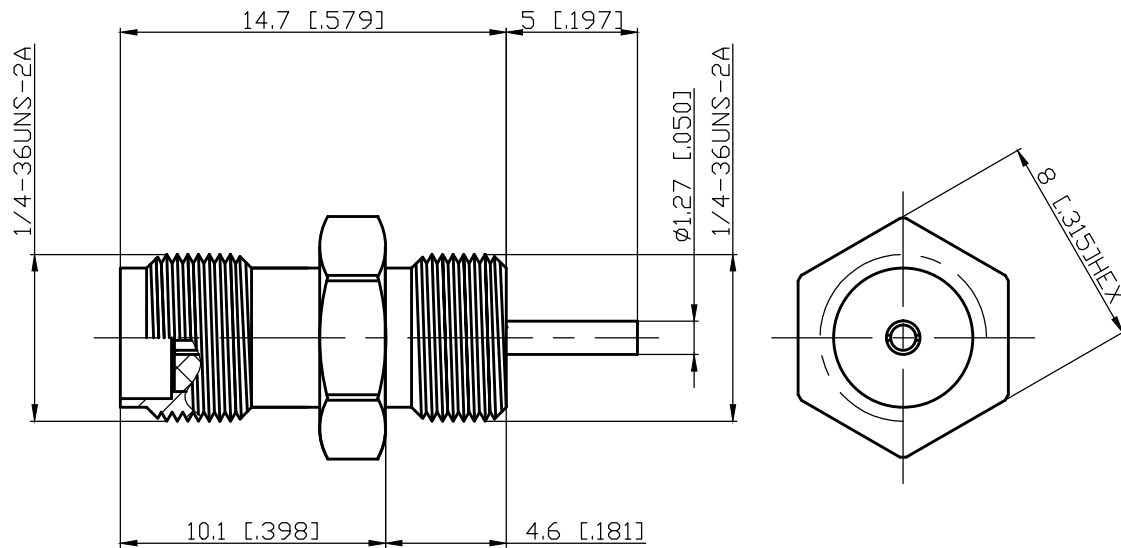

RoHS Compliant.

Interface of SMA connector Per: MIL-STD-348, IEC 60169-15
Material & Finishing:

1. Center conductor: Beryllium, Gold Plating
2. Insulators: PTFE
5. Body : Brass, Gold Plating

Electrical Data:

1. Impedance: 50 Ohms
2. Frequency Range: DC to 10 GHz

ALL DIMENSIONS ARE IN MILLIMETERS AND [INCHES]

LIJEN LLC from KERUI

Title

SMA JACK receptacle
(SMA-KYD-4)

THESE DRAWING & SPEC. ARE THE PROPERTY OF KERUI ELECTRONIC CO., LTD AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.

UNLESS OTHERWISE NOTED
ALL SURFACES FINISHED TO 64/MAX.

ALL TOLERANCES ARE:
DECIMALS FRACTIONS ANGLES
x ± 1.0 x' ± 1' x'' ± 0.5
x.x ± 0.5 x'x' ± 0.5
x.xx ± 0.1

Drawn by
Teresa

Ckd by
Simon

Appd by
Richard

Date
05/06/2023

Scale
4:1

Sheet 1 of 1

10 1121 071 12